


### Savona - System Components


Riviera

- 1 Top Track
- 2 Spring Top Roller/End Cap
- 3 Screw Adjustable Bottom Roller/End Cap
- 4 Panel Locator Ramp
- 5 Bottom Track Flush
- 6 Bottom Track Surface



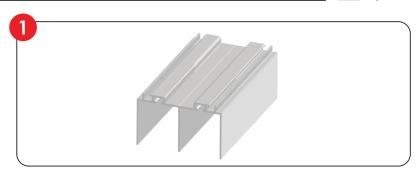









#### **General**

- A "T" Stile
- B Moderno 58 with D Shaped Pull \*\*
- C System 214 Wide 2 1/4" Stile \*\*
- D Sidelite Shoe
- E System 214 Lock
- F System 214 Edge Pull
- G Fixed Lite Receptor

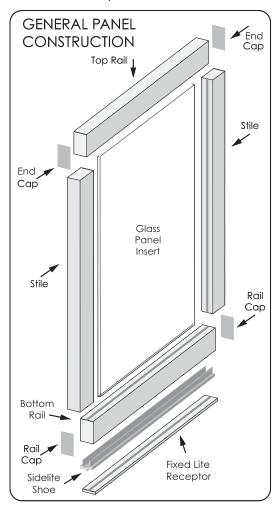

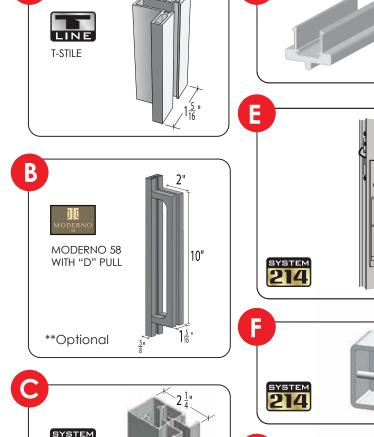

2-1/4" WIDE STILE

\*\*Optional



### **SAVONA** Installation Instructions Header, Ceiling, Soffit Mount


**VERTICALLY FASTENED TOP TRACK - PLAN 6** 

**IMPORTANT:** Read these instructions completely before beginning any installation. Once the product is at the opening site and tools and parts are set up and ready to go, each panel should be able to be installed in 20 - 30 minutes.



## **Install Top Track**

- 1 Measure track and trim top track to length as required.
- 2 Mark drill locations to the side of the top roller grooves spaced at approximately 24" centres alternating down the track length and at each track end point. Drill holes to match screws provided. Screws MUST be located into solid backing.
- IMPORTANT: DON'T POSITION SCREW IN **ROLLER GROOVE**
- 4 Position track across wall thickness keeping in mind the desired backset of fascia. Fasten track vertically to header, soffit or ceiling.

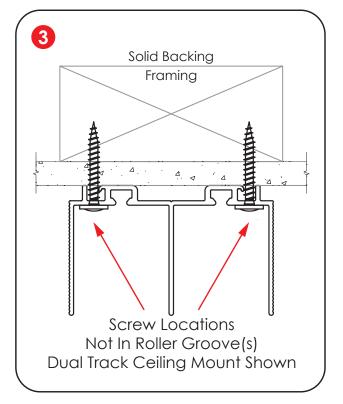


Determine if you have SURFACE floor track or FLUSH floor track.



## **SURFACE Floor Track**

Savona Floor Tracks are designed for concealed fastening. It is **NOT** recommended that they be drilled and screwed down. For a cleaner look follow these instructions:





- 6) Top and bottom tracks are NOT the same width, therefore use the following method for proper vertical alignment. Using plumb-bob trial position track in place by aligning top and bottom track roller grooves. Lightly mark the outside edges at each end of floor track on floor with pencil.
- Apply two sided carpet full length on the track underside on the flat surface that will contact floor. Apply dabs of construction adhesive along the underside of track and position track referencing pencil marks. Two sided carpet tape will hold track in place while adhesive sets.

## **B**) FLUSH Floor Track

Savona Floor Tracks are designed for concealed fastening. It is **NOT** recommended that they be drilled and screwed down. For a cleaner look follow these instructions:

- **5** Shim subfloor to 5/16" below finished floor surface.
- 6 Measure track and trim to length as required.
- 7 Using plumb-bob trial position track in place by aligning top and bottom track roller grooves. Mark the edges at each end of floor track on shim.
- Apply two sided carpet full length on the underside flat surface that will contact shim. Apply dabs of construction adhesive along the underside of track and position track referencing shim marks.


  Two sided carpet tape will hold track in place while adhesive sets.
- **9** Finish flooring up to track edges.


# C) Install the Panel

- Ensure the pre-installed "Spring Rollers" are at the top of the panel.
- Lift the panel up into the guide channel and engage the top rollers into the top track groove. Set the bottom roller into the corresponding floor track groove.
- Adjust floor clearance and vertically wall alignment with wall edge by temporarily shimming the panels between the bottom rail and floor track to take the weight off the bottom rollers. Access the vertical adjustment bolt through the port in each bottom rail cap using a #3 Philips screwdriver.

MANUAL TOOLS SHOULD BE USED FOR THIS PROCESS.

**SPECIAL NOTE:** To achieve a panel positioning along the track push panel locator ramps into the top roller groove and position such that the top roller comes to rest in the centre of the ramp. Secure in place with a dab of silicone.










### Riviera Glass Dividers

#### Savona Fixed Lite Assembly

The sidelite shoe (shown here in red) slots into the track in the fixedlite receptor below. The bottom rail of the panel fits over and down to sit directly on sidelite shoe by adjusting the top rollers. Cushion Capture stops in the top track are then pushed tight against the top rollers to eliminate panel travel.

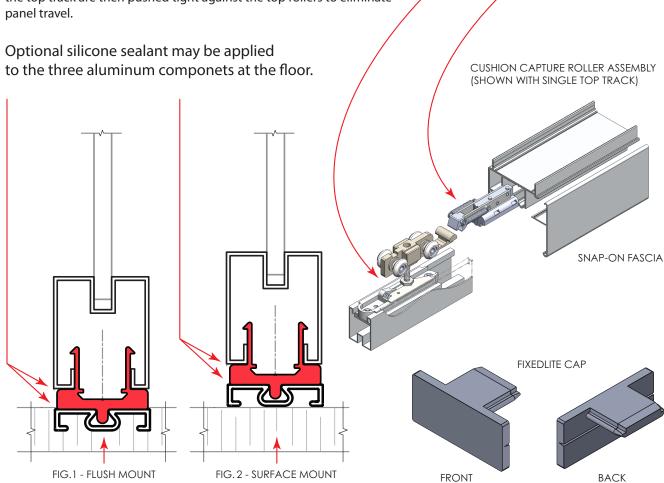

5/16" high fixedlite receptor must be installed on a firm surface using construction adhesive.

It can be installed:

- 1) Flush in the floor (FIG. 1)
- 2) On the floor surface (FIG. 2)


An endcap to cover the shoe and receptor will be provided.

ALLIANCE GLASS DOORS INC.	Riviera Room Dividers • 11/17/20
Surrey, BC, Canada V3W 1A2 • T: 604.501.2588 * F: 604.501.1608	





### Riviera Glass Dividers


### Savona Cushion Capture with Lo Rail

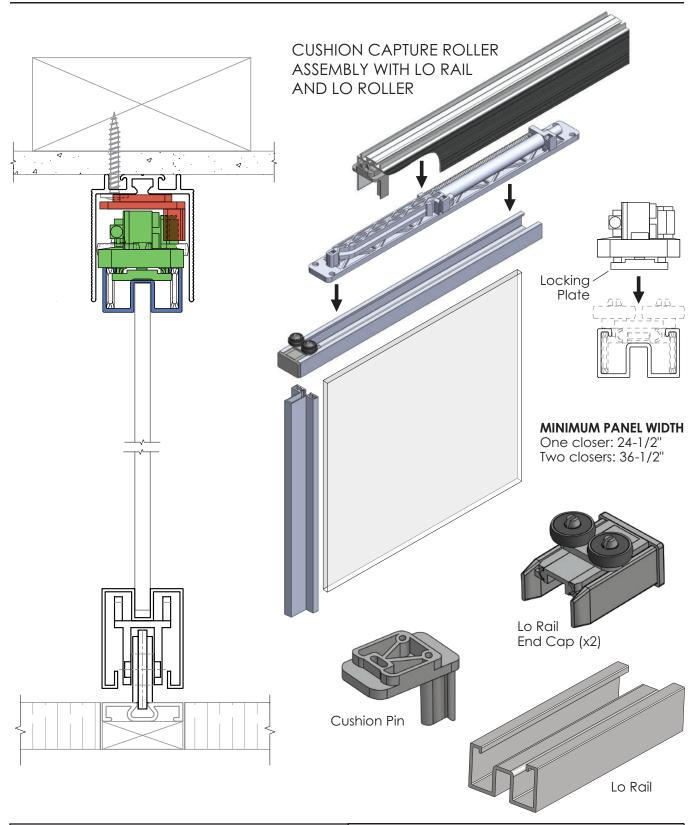



correctly and adjusted to your satisfaction.

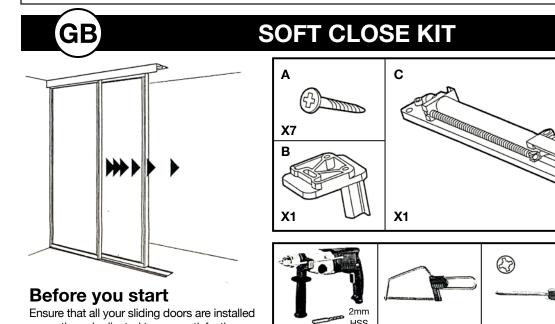


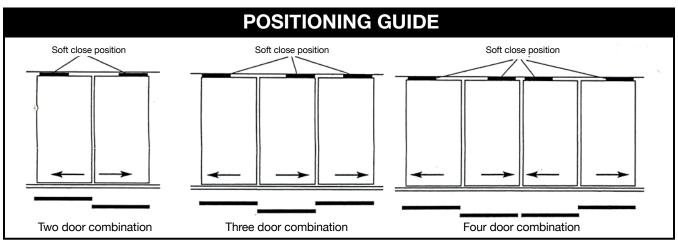

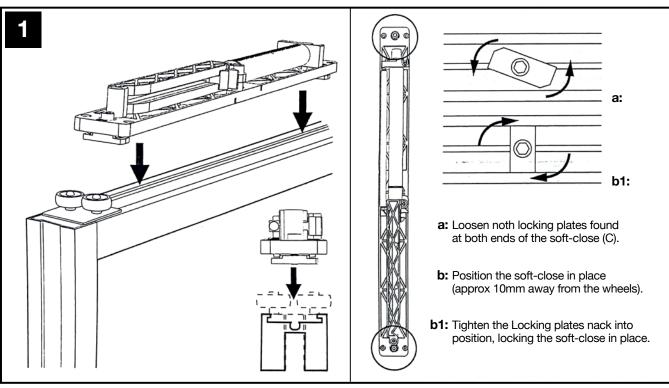

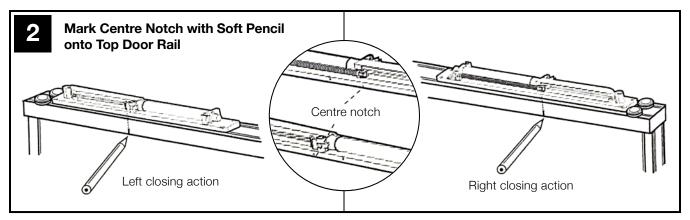




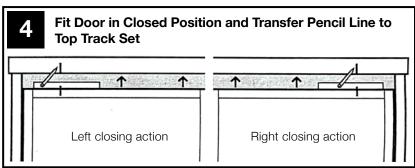



## **MEASURING UP & FITTING THE SOFT CLOSE PIN**


Measure from bottom of the top rail to the top of the Track (A). Then, subtrack 37mm off this measurement. This gives you the height at which your Pin needs to be.


Pin Height = A - 37mm

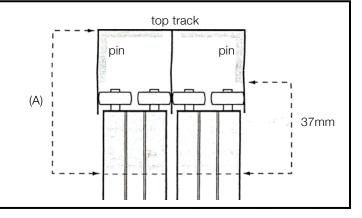












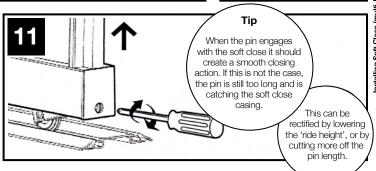

Installing Soft Close (multi-lingual) Issue 2-V3 271





Riviera Glass Dividers are warranted to be free of defects in material and workmanship for a period of one year. Product reported as defective are subject to inspection and validation by an authorized representative. Alliance Glass Doors Inc. will repair, replace or refund the original cost of the parts, at its option. Remedies do not include glass breakage (by any cause), labour, installation costs, finishing costs, indirect or consequential damages.