


<p>S2D-CMxMPxBT - Vertical Mount - Mitred Panels - Butted Tracks</p>	<p>SECTION B</p>	<p>SYSTEM PARTS</p>	<p>OPTIONAL PARTS</p>
<div data-bbox="170 131 630 624"> <p><b>SYSTEM 214</b></p> <p>THIS PLAN IS 2-1/4" WIDE STILE ONLY</p> </div> <p><b>ELEVATION A</b></p>		<div data-bbox="1911 131 2626 635"> <p>CUSHION CAPTURE ROLLER ASSEMBLY (SHOWN WITH SINGLE TOP TRACK)</p> </div>	<div data-bbox="2672 131 2968 352"> <p>BLACK ANODIZED FINISH</p> </div> <div data-bbox="2672 413 2968 635"> <p>SINGLE TRACK END CAP</p> </div>
<div data-bbox="77 766 714 1491"> <p>FIXED PANEL</p> </div> <p>SEE INSTALLATION INSTRUCTIONS FOR CORNER DETAILS</p>	<p>SYSTEM HEIGHT (S/H) ADJUSTMENT (+/-) 1/4"</p> <p>PANEL HEIGHT = S/H - 3"</p>	<div data-bbox="1911 715 2253 1280"> <p><b>SYSTEM 214</b> 2-1/4" WIDE STILE ONLY</p> </div>	<div data-bbox="2672 1290 2812 1562"> <p><b>SYSTEM 214</b> LOCK</p> </div> <div data-bbox="2828 1290 3030 1562"> <p><b>SYSTEM 214</b> EDGE PULL</p> </div>
<p>PROJECT:</p> <p>ARCHITECT:</p>	<p>MONACO Mx-DCP* with Mx-SCP at 90°</p> <p>Double Track - Vertical Mount - Floor Post with Carrier Post to Single Track - Vertical Mount - Floor Post</p>	<div data-bbox="1911 1300 2253 1562"> <p>SIDELITE SHOE</p> </div> <div data-bbox="2284 1300 2626 1562"> <p>CARRIER POST</p> </div>	<p>SPECIAL INSERTS</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> POLAR WHITE GLASS</li> <li><input type="checkbox"/> BLACK GLASS</li> <li><input type="checkbox"/> CUSTOMER SUPPLIED INSERT</li> <li><input type="checkbox"/> DIVISION BARS</li> </ul>
<div data-bbox="77 1753 714 1905"> <p><b>ALLIANCE GLASS DOORS INC.</b> Surrey, BC, Canada, V3W 1A2 T: 604.501.2588 F: 604.501.1608</p> </div>	<p>SHEET:</p> <p>JOB #:</p>	<div data-bbox="1911 1602 2253 1824"> <p>* FLOOR POST</p> </div> <p>DRAWN BY: JL</p>	<p>DATE: 11/08/20</p> <p>CHECKED BY: DL</p>

The sidelite shoe (shown here in red) slots into the track in the fixedlite receptor below. The bottom rail of the panel fits over and down to sit directly on sidelite shoe by adjusting the top rollers. Cushion Capture stops in the top track are then pushed tight against the top rollers to eliminate panel travel.

Optional silicone sealant may be applied to the three aluminum componets at the floor.

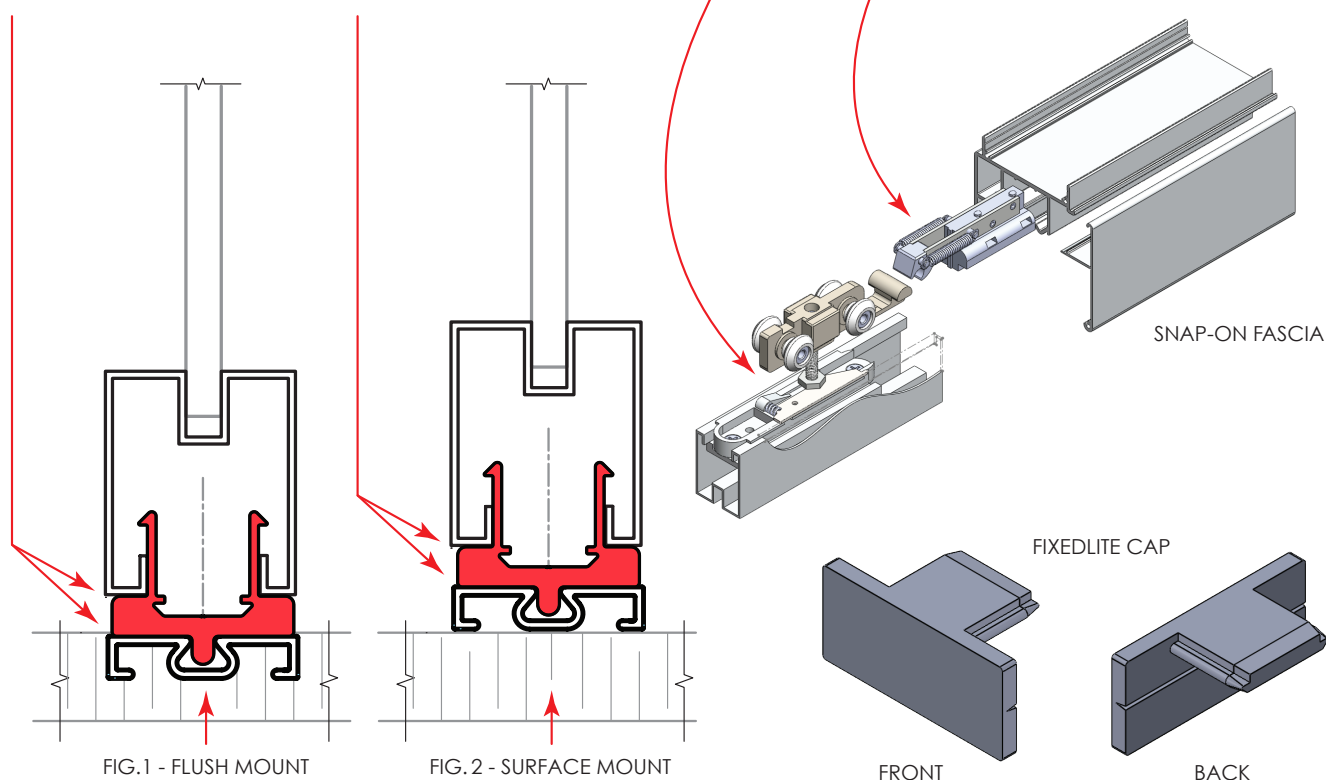

5/16" high fixedlite receptor must be installed on a firm surface using construction adhesive.


It can be installed:

- 1) Flush in the floor (FIG. 1)
- 2) On the floor surface (FIG. 2)

An endcap to cover the shoe and receptor will be provided.

## Monaco - System Components

- 1 - Main Track
- 2 - Snap on Fascia
- 3 - Fixed Lite End Cap
- 4 - Cushion Capture
- 5 - Roller
- 6 - Roller Bumper
- 7 - Adjusting Bolt
- 8 - Hanger Lock
- 9 - Rail Cap
- 10 - Floor Post
- 11 - Carrier Post

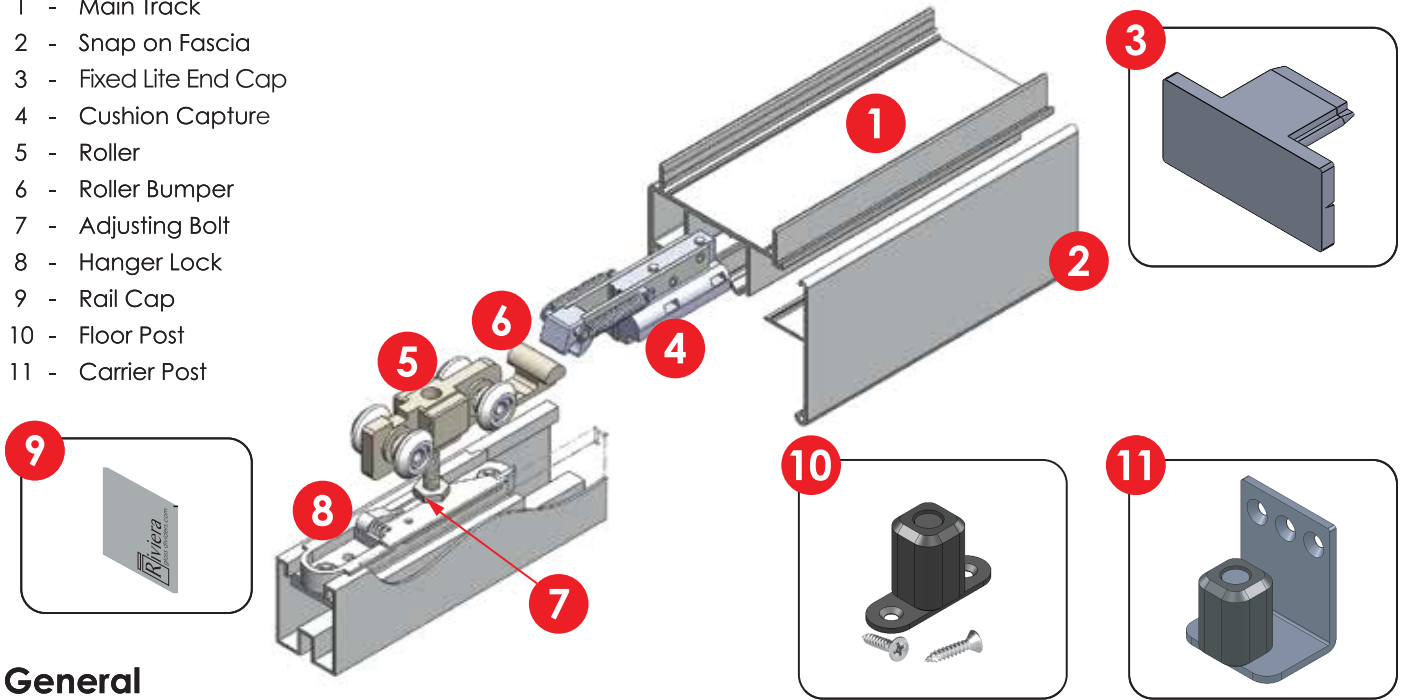

## General

- A - "T" Stile
- B - Moderno 58 with D Shaped Pull \*\*
- C - System 214 Wide 2 1/4" Stile \*\*
- D - Sidelite Shoe
- E - System 214 Lock
- F - System 214 Edge Pull
- G - Fixed Lite Receptor

