


"E" TOP GUIDE CHANNEL

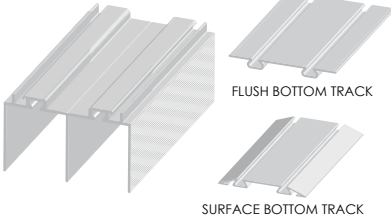

Track Type


Sliding System

- Savona Series for bottom tracking panels, Single, Double or Triple Tracks
- "E" Top Guide Channel - Vertically fastened (Header, Ceiling, Soffit Mount) to required solid backing
- Surface bottom track or Flush bottom track
- Single wheel ball bearing Top Rollers (2 per panel) with spring tensioner
- Optional Cushion Capture soft close stops
- Single wheel ball bearing Bottom Rollers (2 per panel) with adjusting bolt for vertical and "out of plumb wall" adjustment

Aluminum/Glass Panel Profile



T-STILE




"T" Stile Panel Frame (Standard)

Stile	3/4" width x 1 5/16" door thickness with full length face pull
Bottom Rail	1 1/2" height
Top Rail	1 1/2" height
Standard Finish:	Clear Anodized
Optional Finish:	Black Anodized
Division Bars:	Surface mount faux division bars - 1 1/2" x 1/8" for divided lite look



MODERNO 58 WITH "D" PULL




Moderno 58 Stile Panel Frame (Optional)

Stile	5/8" width x 1 5/16" door thickness with "D" shaped pull on panel
Bottom Rail	1 1/2" height
Top Rail	1 1/2" height
Standard Finish:	Clear Anodized
Optional Finish:	Black Anodized
Division Bars:	Surface mount faux division bars - 1 1/2" x 1/8" for divided lite look



2-1/4" WIDE STILE



System 214 Panel Frame (Optional)

Stile	2 1/4" width x 1 5/16" Door Thickness with full length face pull optional 45° deg corner-meeting stile units
Bottom Rail	1 1/2" height
Top Rail	1 1/2" height standard, optional 2 1/4" height
Standard Finish:	Clear Anodized
Optional Finish:	Black Anodized
Optional Lock:	In-stile sliding door lock - Keyed or Privacy functions
Division Bars:	Surface mount faux division bars - 1 1/2" x 1/8" for divided lite look

Maximum Panel Size

Width:	48"	Height:	96"
--------	-----	---------	-----

Glass

Translucent

Standard	Clear Laminated Safety Glass O/A thickness 6mm with .015 PVB Interlayer
Standard	Diffused White Laminated O/A thickness 6mm with .015 PVB Interlayer

Opaque

Optional	Pure White Laminated O/A thickness 6mm with .015 PVB Interlayer
Optional	White Back-Painted Safety Glass O/A thickness 6mm (3mm Cat 2 Vinyl Backing x 2)
Optional	Black Back-Painted Safety Glass O/A thickness 6mm (3mm Cat 2 Vinyl Backing x 2)

Other






Optional	Customer supplied inserts
----------	---------------------------

Application

Visit <http://rivieraglassdividers.com/monaco/> for various plan layouts, link to shop drawings and link to installation instructions

Savona - System Components

- 1 - Top Track
- 2 - Spring Top Roller/End Cap
- 3 - Screw Adjustable Bottom Roller/End Cap
- 4 - Panel Locator Ramp
- 5 - Bottom Track - Flush
- 6 - Bottom Track - Surface

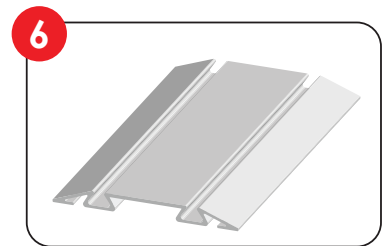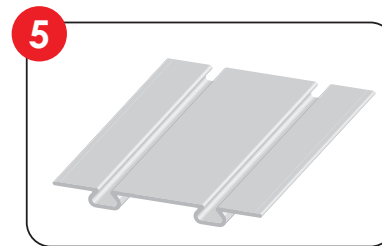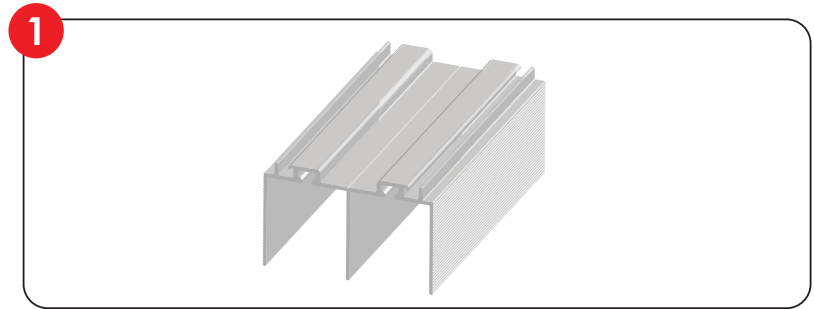

General

- A - "T" Stile
B - Moderno 58 with D Shaped Pull **
C - System 214 Wide 2 1/4" Stile **
D - Sidelite Shoe
E - System 214 Lock
F - System 214 Edge Pull

